


PARTI DI RICAMBIO / REPLACEMENT COMPONENTS


**KIT-SERBATOIO AUSILIARIO CON MECCANISMO A GALLEGGIANTE**  
**KIT-AUXILIARY RECEIVER WITH FLOATING MECHANISM**

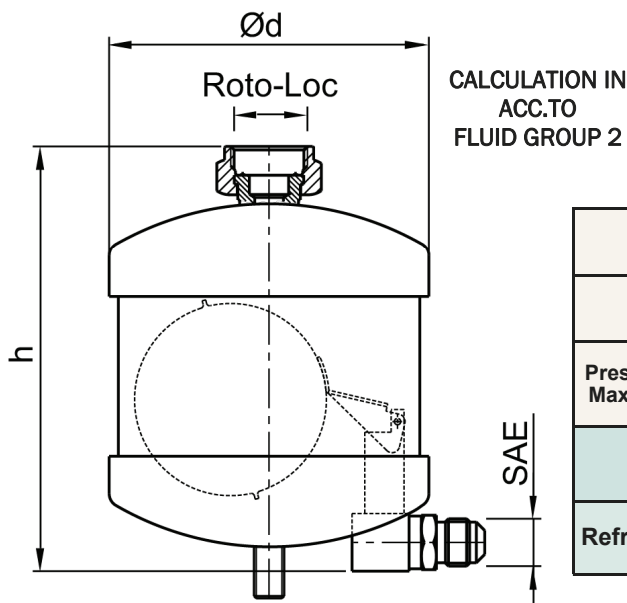

| PED CAT. | TIPO / TYPE | VOL-UME      | ATTACCHI CONNECTIONS |      | DIMENSIONI DIMENSIONS |     |
|----------|-------------|--------------|----------------------|------|-----------------------|-----|
|          |             | litri litres | RotaLock             | SAE  | Ød                    | h   |
| Art.4§3  | S/O-KIT/RtK | 0.6          | 1"                   | 3/8" | 107                   | 140 |

| DATI TECNICI TECHNICAL DATA                                                              |  |                    |                    |
|------------------------------------------------------------------------------------------|--|--------------------|--------------------|
| Temperatura TS - °C<br>Temperature TS - °C                                               |  | Min. -50 Max. +120 | Min. -50 Max. +140 |
| Pressione max. consentita PS -bar<br>Max permissible pressure PS -bar                    |  | 45                 | 33                 |
| Pressione di collaudo PT -bar: 64.35 (45x1.43)<br>Test pressure PT -bar: 64.35 (45x1.43) |  |                    |                    |
| Refrigerants: HCFC-HFC-HFO-HC ,CO <sub>2</sub> and other ones with low GWP               |  |                    |                    |

**FLANGIA DI CHIUSURA CON GALLEGGIANTE E GUARNIZIONE**  
**REPLACEMENT FLOAT ASSY WITH GASKET**

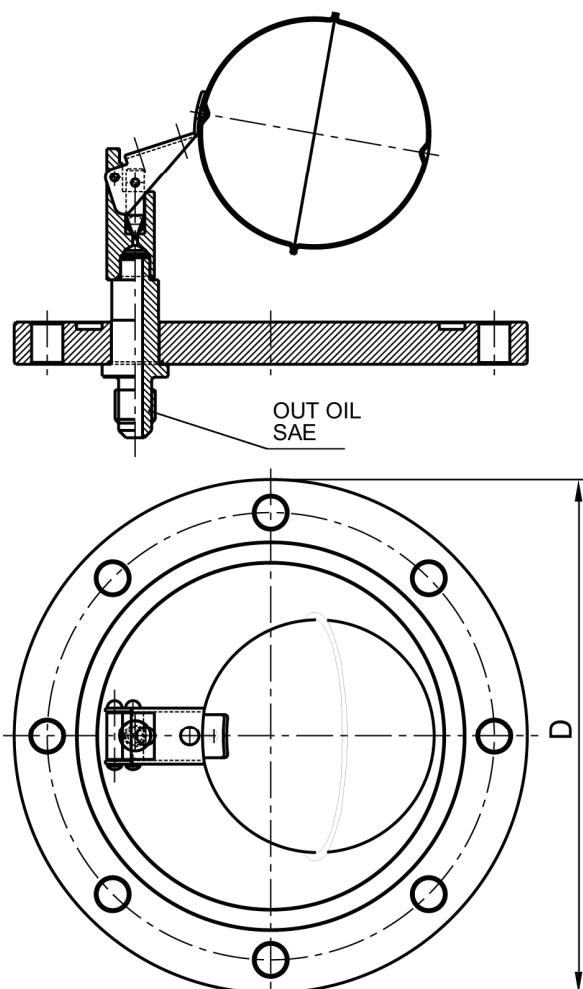

| ATTACCHI CONNECTIONS | DIMENSIONI DIMENSIONS |
|----------------------|-----------------------|
| SAE                  | D                     |
| 3/8"                 | 140                   |
| 1/4"                 | 140                   |

| DATI TECNICI TECHNICAL DATA                                                              |  |                                       |
|------------------------------------------------------------------------------------------|--|---------------------------------------|
| Temperatura TS - °C<br>Temperature TS - °C                                               |  | Min. -50 Max. +120 Min. -50 Max. +140 |
| Pressione max. consentita PS -bar<br>Max permissible pressure PS -bar                    |  | 45 33                                 |
| Pressione di collaudo PT -bar: 64.35 (45x1.43)<br>Test pressure PT -bar: 64.35 (45x1.43) |  |                                       |
| Refrigerants: HCFC-HFC-HFO-HC ,CO <sub>2</sub> and other ones with low GWP               |  |                                       |